

Easy install mounting profile



# Roller blind QS81

## Product information

This model has all the silent and smooth operation features, and is very easy to install due to the mounting profile with easy spring loaded clips.






Please refer to [www.kvadratverosol.nl](http://www.kvadratverosol.nl) for the full range of roller blind types and shapes.

## System drawings

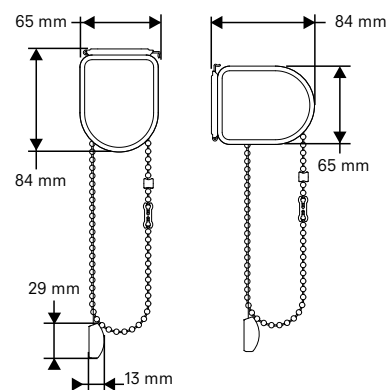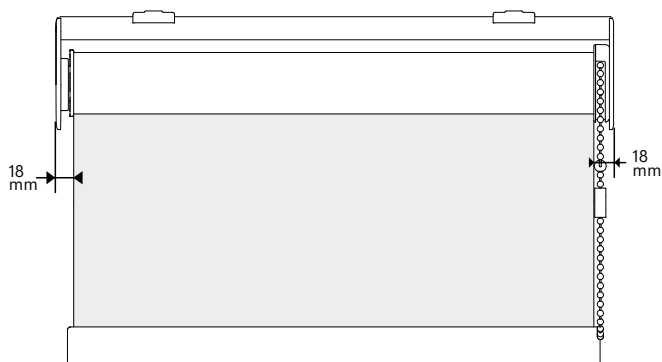

Top fix

Face fix

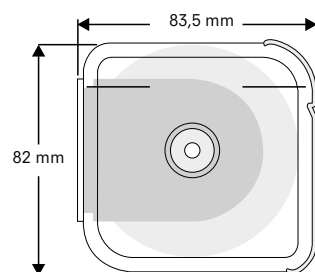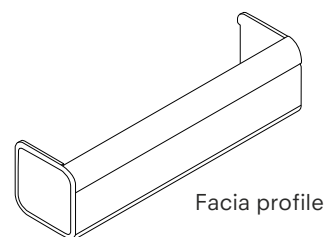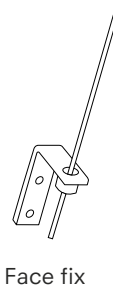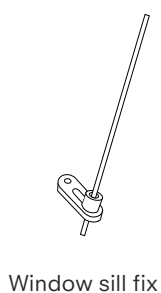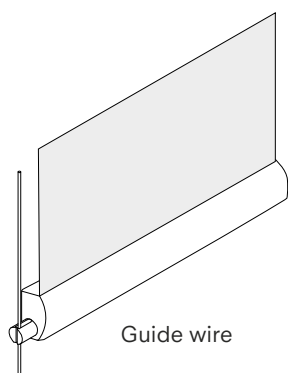

Maximum roll diameter  
with Facia Ø 74 mm

**kvadrat verosol**

## Technical information

<b>Product code</b>	QS81.0	
<b>Product name</b>	Standard roller blind with mounting profile	
<b>Operation</b>	Chain operation	
<b>Tube</b>	Material	Extruded aluminium Ø 44 mm, 49 mm, 57 mm
<b>Dimensions</b>	Width	400 mm min - 2800 mm max (depending on tube and fabric)
	Drop	300 mm min - 4000 mm max (depending on tube and fabric)
	Maximum area	8 m <sup>2</sup>
<b>Mounting bar</b>	Material	Extruded aluminium alloy - asymmetric profile
	Dimensions	52 mm W x 16 mm H
	Colours	Powder coated RAL 9001, 9005, 9010, 9016 or clear anodised
<b>Bottom rail</b>	Material	Extruded aluminium alloy - asymmetric profile
	Dimensions	13 mm W x 29 mm H
	Colours	Powder coated RAL 9001, 9005, 9010, 9016 or clear anodised
<b>End caps</b>	Material	UV stabilised PA
	Colours	Grey, White, Black, coordinated to rail colour
<b>Bead chain</b>	Material	Nickel plated brass or stainless steel
<b>Installation brackets</b>	Material	Press formed Steel
	Application	Top or face fixing - concealed when installed

## Optional

<b>Product code</b>	QS81.4	QS81.5	
<b>Product name</b>	Standard roller blind	Standard roller blind	
<b>Operation</b>	24V DC or 230v AC motor	12V DC battery motor	
<b>Dimensions</b>	Width	600 mm min - 2800 mm max	700 mm min - 2600 mm max
	Drop	300 mm min - 5000 mm max	300 mm min - 4000 mm max
	Maximum area	10 m <sup>2</sup>	9 m <sup>2</sup>
<b>Guide wire</b>	Cable	Steel	
	Bracket	Nickel plated steel	
<b>Fascia Options</b>	Type	QS8 Fascia	
	Material	Extruded aluminium alloy	
	Dimensions	84 mm x 82 mm	Suitable for face fixing
	Maximum width	4800 mm maximum	
	Colours	RAL 9010, 9016 or clear anodised	